



DIN 862
(Style 1AR)

≤100 mm = 20 μm
>100 mm = 30 μm

Hardened
stainless steel

32 mm
diameter
rotating dial
with lock

Slider with
locking screw

Steel gear mechanism,
hardened
and ground

Patented
shockproof
design

Suited
plastic case

Identification
number






Inspection report
with a declaration
of conformity

Dial Calipers

Rugged construction – High accuracy – Patented shockproof design – Ideal for use in the workshop.

Models TESA CCMA-M

Easy-to-read dial calipers – Slider with metal dial housing – Models with a 200 or 300 measuring span fitted with a thumb roller.

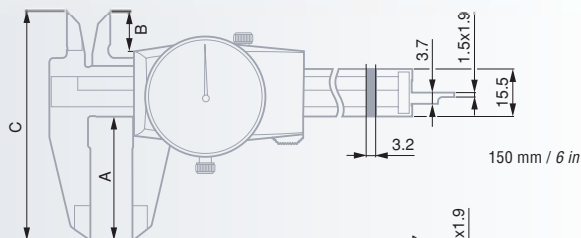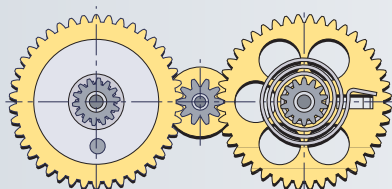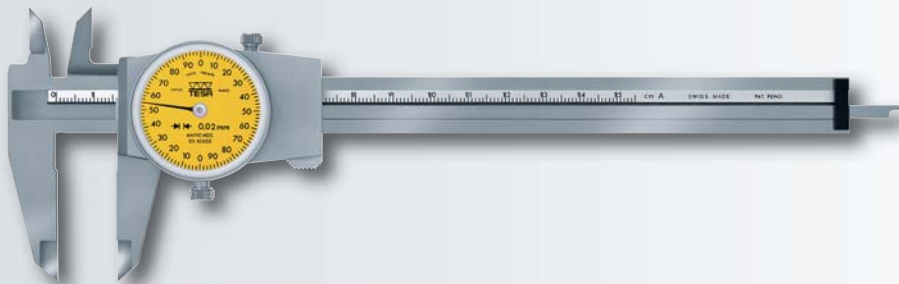

Thumb roller

	A mm	B mm	C mm
00510008	0 ÷ 150 mm	0,02 mm	2 mm
00520002	0 ÷ 6 in	0,001 in	0.1 in
00510045	0 ÷ 200 mm	0,02 mm	2 mm
00510046	0 ÷ 300 mm	0,02 mm	2 mm




Optional Accessory

00560013 Depth foot for models 150 mm/6 in (also see page B-24)



Model ETALON 125

Slider with metal dial housing – 1 mm per pointer revolution.

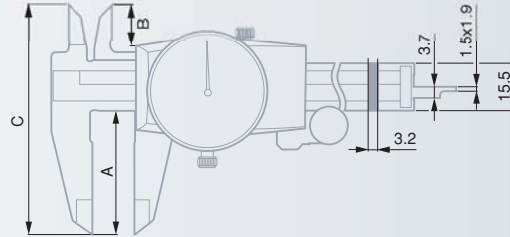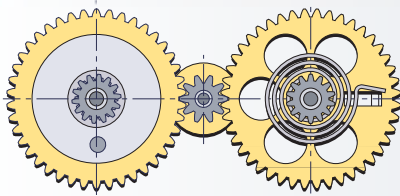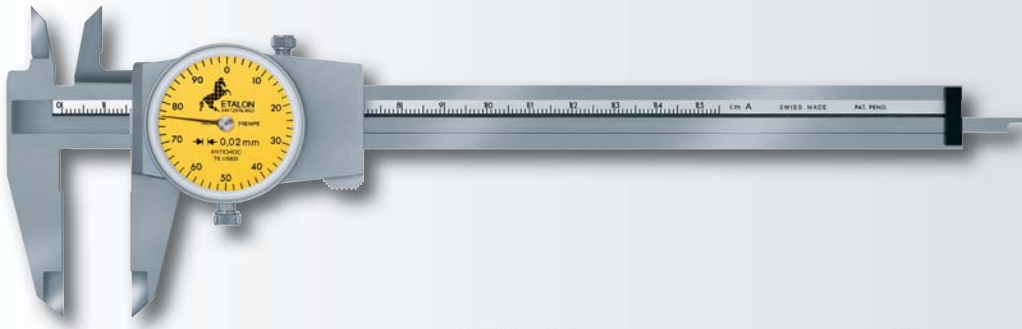

075115821

0 ÷ 150 mm

0,02 mm

1 mm

without thumb roller



Optional Accessory

00560013

Depth foot (also see page B-24)

Model TESA CCMA-M, 0,01 mm

Slider with metal dial housing – 1 mm per pointer revolution.

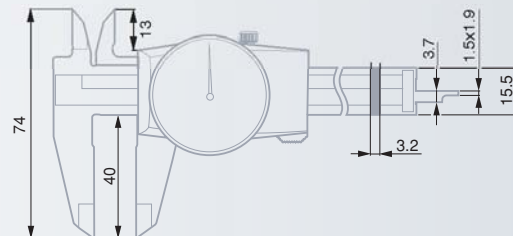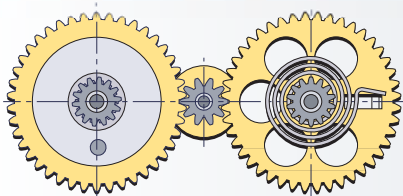

00510050

0 ÷ 150 mm

0,01 mm

1 mm

Optional Accessory

00560013

Depth foot (also see page B-24)



DIN 862
(Style 1AR)



≤ 100 mm = 20 μm
> 100 mm = 30 μm



Hardened
stainless steel



32 mm
diameter
rotating dial
with lock



Slider with
locking screw



Steel gear mechanism,
hardened
and ground



Patented
shockproof
design



Suited
plastic case



Identification
number



Inspection report
with a declaration
of conformity



DIN 862
(Style 1AR)



≤ 100 mm = 20 μm
> 100 mm = 30 μm



Hardened
stainless steel



32 mm dia.
rotating dial
with lock



Slider with
locking screw



Steel gear,
hardened
and ground



Patented
shockproof
design



Suited
plastic case



Identification
number



Inspection report
with a declaration
of conformity

Model TESA CCMA-P

Quick and easy reading – Slider with plastic dial housing.



DIN 862
(Style 1AR)

≤100 mm = 20 μm
>100 mm = 30 μm

Hardened stainless steel

32 mm dia. rotating dial with lock

Slider with plastic dial housing plus locking screw


Steel gear, hardened and ground

Patented shockproof design

Suited plastic case

Identification number

Inspection report with a declaration of conformity

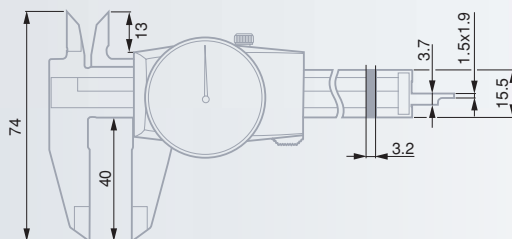

00510004	0 ÷ 150 mm	0,02 mm	2 mm
00520001	0 ÷ 6 in	0.001 in	0.1 in

Optional Accessory

00560013	Depth foot (also see page B-24)
----------	---------------------------------

